


Coaxial Cable Connector 24_MCX-50-2-6/111_N

Description

Straight bulkhead cable feed through

Interface standards

IEC 60169-36_CECC 22220

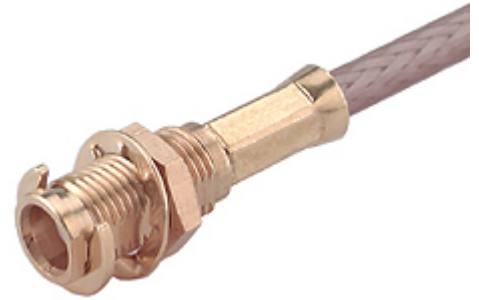

Technical Data

Electrical Data

Impedance 50 Ω
 Interface frequency max. 6 GHz

Mechanical Data

Centre contact crimped
 Outer 2contact crimped
 Weight 0.0014 kg

Environmental Data

Operating temperature -55 °C to 155 °C
 2011/65/EU (RoHS) compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
Fastening nut	Brass	
Washer	Bronze	
Crimp ferrule	Copper	

Related Documents

Outline drawing DOU-00009147
 Catalogue drawing DCA-00008915
 Assembly instruction DOC-0000179868
 Mounting hole DOU-00008855

Ordering Information

Bulk 100 pcs package 24_MCX-50-2-6/111_NH

Additional Information

Suitable cables K_02252_D, ENVIROFLEX_316_D, G_02232_D