
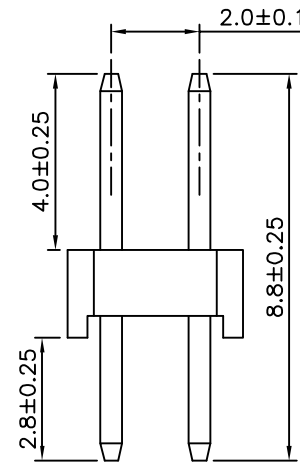
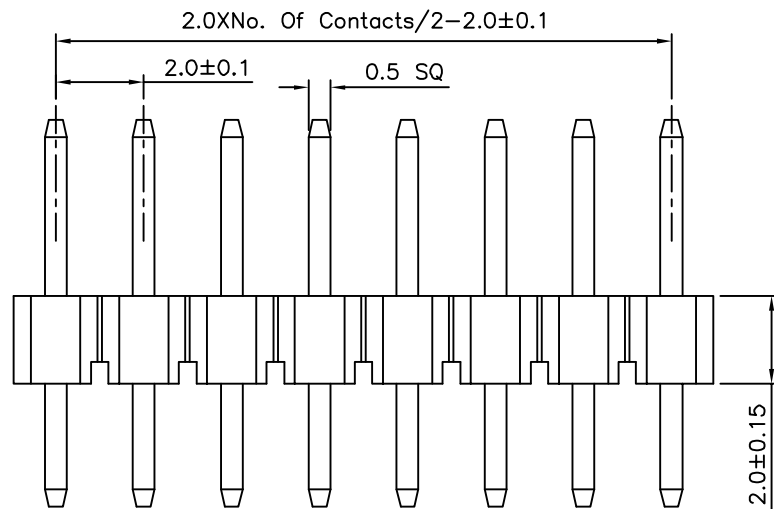


Recommended P.C.B. Layout (Top View)  
(PCB Board Tolerance ±0.05)

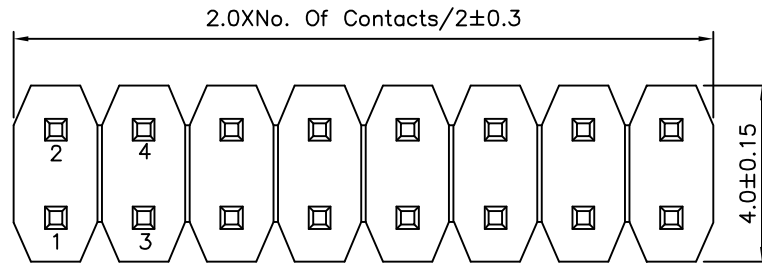

**SPECIFICATION**

Current Rating: 1.5 Amps  
 Withstanding Voltage: 500V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operating Temperature: -40°C ~ +105°C  
 Insulator: PA6T(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

$\frac{M}{(1)} \frac{D}{(2)} \frac{2}{(3)} X \frac{XX}{(4)} - \frac{H}{(5)} \frac{H}{(6)}$

- (1) M: 2.0mm Pin Header
- (2) D: DIP Straight
- (3) 2: Dual Row
- (4) XX: No. of Position/Per Row
- (5) H: Withstand High Temperature Soldering
- (6) H: RoHS Compliant

CATEGORY		APPROVED BY EMILY	
PART No. MD2XXX-HH		CHECKED BY HZF	
DRAWING No. MD2XXX-HH		DRAWING BY YBL	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.25	X.* ±2°
.X ±0.20	.X* ±1.5°
.XX ±0.15	.XX* ±1°
.XXX ±0.10	.XXX* ±0.5°

UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	07/06/2013
		REVISIONS		